

Play it safe



Pro modules

Illustration only

## Pro M2 mono

185 W ▪ 190 W ▪ 195 W ▪ 200 W

- Guaranteed high yields
- 10-year product warranty  
25-year performance warranty
- Manufactured according to premium quality standards

# Pro M2 mono

## Electrical data under STC (Standard Test Conditions: 1000 W/m<sup>2</sup>, 25 °C, AM 1.5)

	$P_{max}$	185 W	190 W	195 W	200 W
Rated power					
Sorting limits of performance		0/+5 W	0/+5 W	0/+5 W	0/+5 W
Voltage	$U_{MPP}$	36.42 V	36.50 V	36.94 V	37.39 V
Open circuit voltage	$U_{OC}$	45.05 V	45.20 V	45.28 V	45.50 V
Current	$I_{MPP}$	5.08 A	5.21 A	5.28 A	5.35 A
Short-circuit current	$I_{SC}$	5.41 A	5.53 A	5.58 A	5.79 A
Efficiency		14.5 %	14.9 %	15.3 %	15.7 %

## Temperature data

Power temperature coefficient	$T_K(U_{OC})$	-0.31 %/K
Voltage temperature coefficient	$T_K(U_{OC})$	0.05 %/K
Current temperature coefficient	$T_K(P_{MPP})$	-0.41 %/K

## Further information


Number of cells	72
Max. system voltage	1000 V
Reverse current loading capability	15 A
Front cover	Special hardened low-iron glass
Module connection	Connection box with 3 bypass diodes ca. 90 cm cable, Ø 4 mm <sup>2</sup>
Snow load* Load tested according to EN IEC 61215 (ed. 2)	5400 Pa $\triangleq$ 550 kg/m <sup>2</sup>

Our general warranty conditions apply, but in derogation of point 2, the product warranty shall run for ten (10) years and in derogation of point 1.1 the performance warranty shall run 90% for 12 years and 80% for 25 years. The remaining terms and conditions shall remain unaffected.

Subject to technical modifications with corresponding follow-up certifications.

## Certifications

EN IEC 61215 (ed. 2)	pending
EN IEC 61730-1, -2	pending

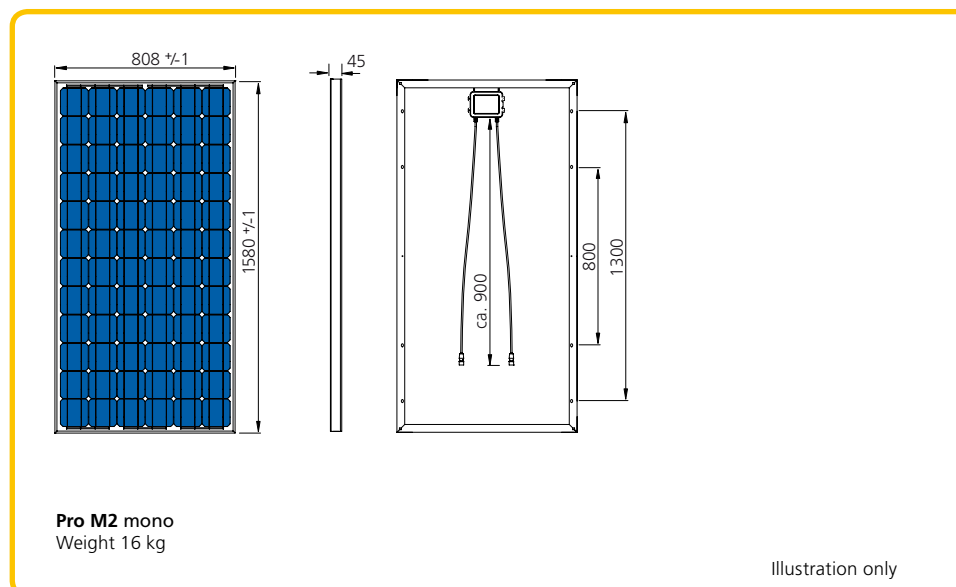

Your specialist dealer:

**Solar-Fabrik AG**  
 Munzinger Str. 10  
 79111 Freiburg  
 Germany  
 Phone +49 (0)761 4000-0  
 Fax +49 (0)761 4000-199  
[www.solar-fabrik.de](http://www.solar-fabrik.de)